




B200-B300

**INK
DOSER**

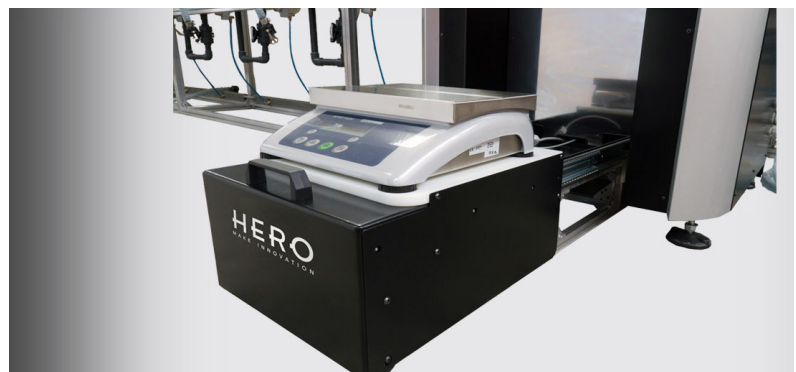

TECHNICAL FEATURES

Dosage	Sequential gravimetric with fixed head up to 16 circuits + 1 additional for the dosage of the water (or solvent)
Flow rate	8-10 L/min (up to 2000 cPs)
Accuracy	+/- 5g (higher precision on request)
Dosing head	Fixed with lodging of maximum 16 valves with 10 mm aperture and ϕ 230 mm
Washing	Intelligent washing system with independant valves. Optimization of the waste water
Pumps	Diaphragm with double membrane and damper flow
Storage	200 L drums
	Palletizable IBC
	INOX tanks on project
	Interface with existing tanks
	Armed lids with suction and recirculation
	Level sensors and agitation system available on request
Can lodging	B200: extractable tray with electronic scale lodging B300: floor electronic scale compartment
Scale	B200: 35 kg electronic scale with electromagnetic compensation and precision +/- 0,1 g B300: 150 kg electronic scale with electromagnetic compensation and precision +/- 2 g (+/- 0,2 g on request)
Filtres	Y filtres with variable dimension grid according to the requests